

# इंटरनेट

# मानक

## Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”


IS 12156 (2006): Marine Structures - Mobile offshore units  
- Anchor winches [TED 19: Marine Engineering and Safety  
Aids]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”

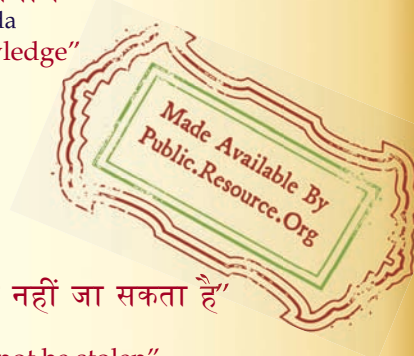

“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”



BLANK PAGE



भारतीय मानक

समुद्रीय संरचनाएं — चल अपतट इकाइयाँ — एंकर चर्खियाँ  
( पहला पुनरीक्षण )

*Indian Standard*

MARINE STRUCTURES — MOBILE OFFSHORE  
UNITS — ANCHOR WINCHES

*( First Revision )*

ICS 47.020.50

© BIS 2006

**BUREAU OF INDIAN STANDARDS**  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI 110002

January 2006

Price Group 3

## NATIONAL FOREWORD

This Indian Standard (First Revision) which is identical with ISO 9089 : 1989 'Marine structures — Mobile offshore units — Anchor winches' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendation of the Marine Engineering and Safety Aids Sectional Committee and approval of the Transport Engineering Division Council.

This Indian Standard was first published in 1987. This revision was undertaken to harmonize it with present international practices.

The text of the International Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear, referring to this standard, they should be read as 'Indian Standard'.
- b) Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards which are to be substituted in their places are listed below along with their degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 1704 : 1991 Shipbuilding — Stud-link anchor chains	IS 4484 : 1994 Shipbuilding electrically welded stud-link anchor chains and connecting shackles and swivels — Specification ( <i>second revision</i> )	Technically Equivalent
ISO 2408 : 1985 Steel wire ropes for general purposes — Characteristics	IS 2266 : 2002 Steel wire ropes for general engineering purposes — Specification ( <i>fourth revision</i> )	do
ISO 3828 : 1984 Shipbuilding and marine structures — Deck machinery — Vocabulary	IS 8650 (Parts 1 to 5) : 1989 Shipbuilding — Deck machinery — Glossary of terms and graphical symbols ( <i>first revision</i> )	do
ISO 7825 : 1985 Shipbuilding — Deck machinery — General requirements	IS 12719 : 1989 Shipbuilding — Deck machinery — General requirements	do

The technical committee has reviewed the provisions of the following International Standards referred in the adopted standard and decided that they are acceptable for use in conjunction with this standard:

<i>International Standard</i>	<i>Title</i>
ISO 2944 : 1974	Fluid power systems and components — Nominal pressures
ISO 4413 : 1979	Hydraulic fluid power — General rules for the application of equipment to transmission and control systems

(Continued on third cover)

*Indian Standard*  
**MARINE STRUCTURES — MOBILE OFFSHORE  
UNITS — ANCHOR WINCHES**  
*( First Revision )*

## 1 Scope

This International Standard specifies requirements of anchor winches for position keeping, and temporary and emergency anchoring of mobile offshore units, particularly drill-ships, semi-submersible drilling rigs and accommodation platforms.

These requirements do not apply to anchor winches which are used for other purposes such as hauling the vessel as is the case for pipelaying, ploughing, pile-driving and crane vessels.

### NOTES

1 Where national regulations and the rules of classification societies differ from this International Standard, they take precedence.

2 The attention of users is drawn to the mandatory adoption of some standards by international organizations or national administrations.

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1704:1973, *Shipbuilding — Anchor chains*.

ISO 2408:1985, *Steel wire ropes for general purposes — Characteristics*.

ISO 2944:1974, *Fluid power systems and components — Nominal pressures*.

ISO 3828:1984, *Shipbuilding and marine structures — Deck machinery — Vocabulary*.

ISO 4413:1979, *Hydraulic fluid power — General rules for the application of equipment to transmission and control systems*.

ISO 6482:1980, *Shipbuilding — Deck machinery — Warping end profiles*.

ISO 7825:1985, *Shipbuilding — Deck machinery — General requirements*.

ISO 8369:1986, *Large diameter steel wire ropes*.

IEC 92:1965 to 1988, *Electrical installations in ships*.

## 3 Definitions

For the purposes of this International Standard, the definitions given in ISO 3828 and the following definitions apply.

**3.1 anchor winch:** Cable-lifters for chain cable, drum units or twin drum units for wire or textile rope or units for handling combined chain cable and wire or textile rope anchor line, collectively.

**3.2 anchor line:** Chain cable, steel wire rope or textile rope or a combination thereof handled by the anchor winch.

**3.3 anchor winch side:** Side as defined in 3.3.1 or 3.3.2.

**3.3.1 right-hand winch:** Winch where, in relation to an observer on the side of the motor, power supply or controller, the drive for the cable-lifter or wire-drum is on the right of the cable-lifter or wire-drum.

**3.3.2 left-hand winch:** Winch where, in relation to an observer on the side of the motor, power supply or controller, the drive for the cable-lifter or wire-drum is on the left of the cable-lifter or wire-drum.

**3.4 nominal load:** Chain or rope tension that the winch is able to maintain continuously when hauling at nominal speed, measured either at the cable-lifter exit, or at the rope exit of the first layer in the case of a wire-drum.

## **4 Functional and operational requirements**

### **4.1 Hauling**

The winch shall be capable of exerting a pull of at least 0,35 times the breaking strength of the anchor line at no speed for chain cable and 0,44 times the breaking strength for wire rope at the first layer on the drum.

Nominal load shall be at least 0,25 times the breaking strength for chain and 0,31 times for wire rope. Maximum values shall be agreed, if necessary, between manufacturer and purchaser.

High speed or slack rope speed shall be agreed upon between manufacturer and purchaser in each case.

### **4.2 Braking**

#### **4.2.1 Static braking**

For each anchor winch, two separate static brake systems, designated first and second below, shall be operable at all times.

If a chain or wire rope stopper is installed, the static brake capacity shall be sufficient to maintain at least 0,8 times for the first system, and 0,5 times for the second system, the breaking strength of the chain or wire rope, whichever is higher.

If a chain or wire rope stopper is not installed, the static brake capacity shall be sufficient to maintain at least 1 times for the first system, and 0,5 times for the second system, the breaking strength of the chain or wire rope, whichever is higher.

When engaged, the braking systems of the anchor winch shall not be affected by a failure of the normal power supply.

If the power supply fails during operation, a residual braking force of at least 50 % of the static braking capacity given above shall be instantly and automatically applied.

For wire-rope drums with multiple layers, the requirements in 4.1 and 4.2 shall apply to the first layer.

#### **4.2.2 Dynamic braking for anchor deployment**

Provision shall be made for necessary braking force capacity during setting of the anchor.

### **4.3 Emergency release of static brakes**

It shall be possible to carry out emergency release of the static brakes within 15 s even when the normal supply fails.

This emergency release shall be possible with the vessel inclined up to 35° in any direction and with a tension up to the breaking strength of the anchor line.

It shall be possible to limit the speed of the released anchor line and to apply and release one of the brakes at least once during the emergency release.

### **4.4 Operation**

Operation of the winch shall be in accordance with ISO 7825.

When released, the operating handle shall automatically return to the stop position.

If not arranged otherwise, the winch shall be equipped with means to measure tension, length and speed of each anchor line. In addition indicators for clutches, brakes, etc., shall be supplied to ensure safe operation.

The speed shall be adjustable to zero or have a special creep speed for precise tensioning or for stowing the anchors.

## **5 Design and construction**

Anchor winches shall meet the general requirements for deck equipment in ISO 7825, and the specific requirements given in 5.1 to 5.10.

**NOTE 3** Attention is drawn to the requirements of national administrations and relevant classification societies.

### **5.1 Chain cable**

This International Standard is based upon the use of chain cable which shall have dimensions in accordance with ISO 1704 and breaking strength to be specified [see clause 7 g)].

### **5.2 Wire rope**

This International Standard is based upon the use of wire ropes which shall conform to ISO 2408 and ISO 8369, having a breaking strength to be specified [see clause 7 g)].

### 5.3 Textile rope

When textile ropes are used, they should conform to the requirements of the relevant International Standards as closely as possible.

### 5.4 Warping ends

A winch may be specified with or without warping ends; their profile shall be in accordance with ISO 6482.

When warping ends are specified, the purchaser shall state whether the drum is to be declutchable. If only one warping end is specified, its position (right or left) shall also be stated in the order.

### 5.5 Cable-lifters

The cable-lifters shall have at least five snugs. The width of the groove shall be sufficient for a kenter-type joining shackle, but it shall not exceed 1,6 times the normal chain diameter.

### 5.6 Wire-rope drums

The ratio between the drum core and wire rope diameter shall not be less than 15.

If the winch is not equipped with a spooling system, the drum flanges shall protrude at least 1,5 times the wire diameter beyond the top layer of wire rope on the drum.

The fastening of the wire rope to the drum shall have a strength of about 0,25 times the breaking strength of the anchor line, unless otherwise agreed by manufacturer and the wire purchaser.

Provision shall be made for easy manual removal of the wire rope from the drum.

### 5.7 Guide sheaves

Guide sheaves for chain cable with snugs shall comply with the requirements given for cable-lifters in 5.5.

Guide sheaves for chain cable without snugs shall be specially considered in each case.

Guide sheaves for wire rope shall have a minimum diameter of 20 times the wire rope diameter.

### 5.8 Calculations

Dynamic effects due to sudden start and stop shall be closely considered when the stresses are determined.

For elements subjected to loads with a low number of load cycles, an analysis of nominal stresses is sufficient to determine the strength.

When the number of load cycles exceeds 10 000, due consideration shall be given to stress concentration factors, the load spectrum, etc., to determine the fatigue stresses.

### 5.9 Allowable stresses

The anchor winch shall be constructed in such a way that no stress calculated by simple elastic theory occurs which exceeds 0,9 times material 0,2 % proof stress, when subjected to a static load equal to the breaking strength of the anchor line.

Stress so calculated in the brake systems or parts being exposed to load during braking shall not exceed 0,85 times the material 0,2 % proof stress during such loads.

When emergency release is effected, the stresses shall not result in permanent deformation in any part.

The yield stress shall not be assumed higher than 0,8 times the minimum breaking strength of the material.

Components liable to fatigue shall be designed for at least 10 years life.

### 5.10 Drive equipment

**5.10.1** Electrical drives and control equipment shall conform to the requirements of IEC 92.

**5.10.2** Hydraulic drives and control equipment shall conform to the requirements of ISO 4413. Systems nominal pressure shall be selected from ISO 2944.

## 6 Acceptance tests

All winches shall be subjected to the following tests at the workshop or on board:

- function of clutches, brakes, chain or wire rope stoppers, etc.;
- calibration of instruments for tension, length, and speed;
- no-load test at nominal speed for 30 min in each direction, with checks for leakages, bearing temperature and abnormal noise;
- test of maximum hauling tension.

In addition, one winch of each type shall be tested for



- e) the static brake power of the brakes at a torque equal to the braking capacity as specified in 4.2.1;
- f) residual brake force as defined in 4.2.1;
- g) holding power of chain or wire rope stopper at a load corresponding to the anchor line breaking strength;
- h) emergency release at a load corresponding to the anchor line breaking strength.

Which tests are to be carried out at the workshop and which on board shall be agreed upon between the manufacturer, purchaser and other parties involved.

## 7 Designation

Anchor winches conforming to this International Standard shall be designated as follows:

- a) denomination: anchor winch;
- b) the number of this International Standard: ISO 9089;
- c) type of winch as follows:
  - CU = cable-lifter unit for chain cable,
  - DU = drum unit for rope,
  - TU = twin drum unit for rope,
  - CCWU = unit with a system where it is not necessary to disconnect the chain cable from the rope,
  - DCWU = unit with a system where chain cable and rope can be disconnected;
- d) side of winch according to 3.3:
  - R = right-hand,
  - L = left-hand;
- e) type of drive:
  - E = electric,
  - H = hydraulic,
  - S = steam;
- f) diameter of chain cable and/or wire rope or textile rope in millimetres (see ISO 1704, ISO 2408 and ISO 8369);

- g) breaking strength in kilonewtons;
- h) length of wire rope (if any) or textile rope (if any) in kilometres.

For combined anchor lines, the various line elements shall be described beginning at the anchor (see example 2), giving their diameter and breaking strength.

- i) number and, where applicable, position of warping-ends: R or L (see 5.4);
- j) information on motive power: voltage and frequency of electric current, or hydraulic fluid pressure and flow rate;
- k) type of drum connection (add X only if it is declutchable).

### EXAMPLE 1

Designation of an electric-driven right-hand cable-lifter unit for chain cable of 76 mm diameter and 6 130 kN breaking force, 440 V voltage and 60 Hz frequency:

**Anchor winch**  
**ISO 9089 CU - R - E 76 × 6 130 - 440/60**

### EXAMPLE 2

Designation of a hydraulic-driven left-hand unit for a continuous anchor line system consisting of 83 mm diameter 5 600 kN breaking force chain cable at the anchor end and 89 mm diameter rope at the other end, of 1,5 km length, with one warping end, not declutchable, on the left, 440 V voltage and 60 Hz frequency:

**Anchor winch**  
**ISO 9089 CCWU - L - H 83 × 5 600/89 × 5 600 - 1,5 - 1L - 440/60**

## 8 Marking

Anchor winches conforming to this International Standard shall be permanently marked as follows:

- a) the number of this International Standard: ISO 9089;
- b) diameter of chain cable and/or wire rope or textile rope in millimetres (see ISO 1704, ISO 2408 and ISO 8369);
- c) breaking strength in kilonewtons;
- d) length of wire rope (if any) or textile rope (if any) in kilometres.

For combined anchor lines, the various line elements shall be described beginning at the anchor (see example 2), giving their diameter and breaking strength.

#### EXAMPLE 1

An anchor winch meeting conditions as for designation example 1 shall be marked:

**ISO 9089 76 × 6 130**

#### EXAMPLE 2

An anchor winch meeting conditions as for designation example 2 shall be marked:

**ISO 9089 83 × 5 600/89 × 5 600 - 1,5**

## 9 Documentation

### 9.1 Workshop certificate

A workshop certificate documenting the following specifications shall be delivered with each winch:

- a) diameter and breaking strength of chain cable or wire rope;

- b) length of wire rope;
- c) static brake force for each brake (first layer);
- d) holding force for chain or wire rope stopper (first layer);
- e) dynamic brake capacity;
- f) residual brake force;
- g) maximum hauling force at no speed;
- h) hauling capacity at the various speed ranges.

### 9.2 Instructions for use and maintenance

All information for correct installation, safe use and necessary maintenance of the winches shall be contained in an instruction manual.

In addition to the specifications given in the workshop certificate, the instructions shall describe the function of the winch, and give procedures for normal and emergency operations.

**NATIONAL ANNEX A**  
( *National Foreword* )

**A-1 BIS CERTIFICATION MARKING**

**A-1.1** The product may also be marked with the Standard Mark.

**A-1.2** The use of the Standard Mark is governed by the provisions of *the Bureau of Indian Standards Act, 1986* and the Rules and Regulations made thereunder. The details of conditions under which the licence for the use of the Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.

(Continued from second cover)

<i>International Standard</i>	<i>Title</i>
ISO 6482 : 1980	Shipbuilding — Deck machinery — Warping end profiles
ISO 8369 : 1986	Large diameter steel wire ropes
IEC 92 (1965 to 1988)	Electrical installations in ships

For BIS Certification Marking, details are given in National Annex A.

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

## Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act*, 1986 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

### Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

### Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards : Monthly Additions'.

This Indian Standard has been developed from Doc : No. TED 19 (517).

### Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

### BUREAU OF INDIAN STANDARDS

#### Headquarters :

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002  
Telephones : 2323 01 31, 2323 33 75, 2323 94 02

Telegrams : Manaksanstha  
(Common to all offices)

#### Regional Offices :

	Telephone
Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110 002	{ 2323 76 17 2323 38 41
Eastern : 1/14 C.I.T. Scheme VII M, V. I. P. Road, Kankurgachi KOLKATA 700 054	{ 2337 84 99, 2337 85 61 2337 86 26, 2337 91 20
Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160 022	{ 260 38 43 260 92 85
Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600 113	{ 2254 12 16, 2254 14 42 2254 25 19, 2254 23 15
Western : Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400 093	{ 2832 92 95, 2832 78 58 2832 78 91, 2832 78 92
Branches : AHMEDABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR. NALAGARH. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM. VISAKHAPATNAM.	